


# relax



## Residential water heaters

# It's Rheem®

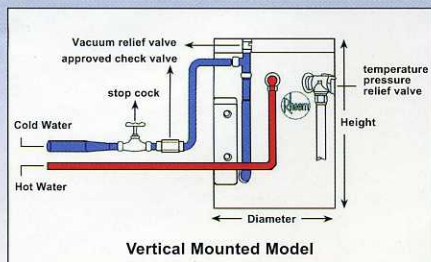

### Rheem water heaters with special features to ensure the heater is safer, more reliable and works longer...

- **Exclusive Rheemglas enamel tank protection against corrosion** by coating the inner tank with an exclusive Rheemglas and fused with solid steel at 870°C. The result is a smooth, tough glass-like lining that effectively resists the corrosive attack of hot water chemicals and ensures a longer life span on Rheem heaters. Tank is designed and tested to withstand 2000kpa hydrostatic test pressure for working pressure of 1000kpa.
- **UL approved combined temperature and pressure relief (TPR) safety valve** provides protection against excessive water pressure (Pre-set at 150PSI).
- **Adjustable thermostat with over temperature protection** is a safety device that automatically and safely cuts off the power in the event the preset temperature is exceeded, thus prevents scalding by hot water. Thermostat conserves electricity by cutting-off power supply to the heater once it has reached the preset temperature.
- **Incoloy sheathed immersion heating element** promotes longer, more efficient performance. Efficient heat transfer design reduces sediments built-up in tank.
- **Anode rod protects the inner tank from corrosion** by equalizing aggressive water reaction, thus extending the lifespan of the heater.
- **CFC free polyurethane insulation** between inner tank and epoxy coated steel jacket provides maximum heat retention and minimize operating cost year after year of service.
- **Compliance** to international requirement IEC 60335-2-21 and U.L 174. Tested and approved by PSB Corporation.

Model	Tank Capacity		Stainless Steel Element		Operating Weight (Kg)	Heater Dimension		Shipping Weight (Kg)	Shipping Dimension			Current Draw (amps)	Over Current Protection (amps)	Approx. * Heat up Time to 60°C
	USG	Litres	Voltage	(Kw)		Dia(mm)	Ht (mm)		L (mm)	B (mm)	Ht (mm)			
85VP6S	6	23	240V	1.5 / 3.0	40	400	390	17	460	420	420	6.25/12.5	15	19 mins
65SVP10S	10	38	240V	1.5 / 3.0	57	400	445	19	460	420	470	6.25/12.5	15	31 mins
65SVP15S	15	57	240V	3.0	83	450	510	26	510	470	540	6.25/12.5	15	46 mins
85VP20S	20	76	240V	3.0	108	500	640	32	560	520	670	12.5	15	61 mins
85VP30S	30	113	240V	3.0	156	553	770	43	620	570	810	12.5	15	92 mins

\* Heat up time is calculated based on a 3kw, incoming temperature of 25°C. All pipe size for inlet and outlet – 3/4 inch. N.P.T. All single phase.

## DEPENDABLE • HIGH PERFORMANCE • ENERGY EFFICIENT

Although out of sight, the Rheem heater keeps on working, 24/7, year after year.

Call now, for a Rheem dealer nearest to you!



**Rheem Manufacturing Company (Singapore) Pte Ltd**

8 Pandan Crescent, UE Tech Park #02-02 Singapore 128464

Tel (Sales) : (65) 6872 1161

Tel (Service) : (65) 6872 2043

Fax : (65) 6872 1151

Email : rheem@rheemmfg.com.sg

Authorised Dealer